




SPECIAL RIVETS CORP.


恒昭企業股份有限公司

No. 699 Fuke Road, Situn District, Taichung City 40764, Taiwan
TEL: 886-4-24623555 FAX: 886-4-24621777
E-mail: srcrivet@ms12.hinet.net <http://www.src.com.tw>

Steel Blind Nuts

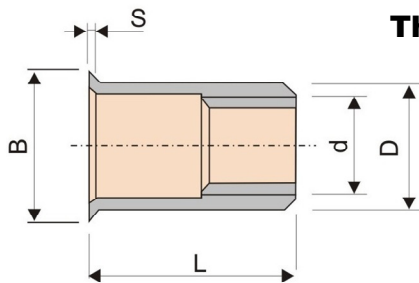

Thinsheet



Non-Ribbed



Ribbed

Thinsheet (Reduced Head) Type





Thinsheet Blind Nuts provide a nearly flush installation along with an excellent fit to mating materials.

NUT CODE	THREAD SIZE d (mm)	NUT DIAMETER D (mm)	HOLE SIZE (-0/+0.1mm)	NUT LENGTH L (mm)	GRIP RANGE G (mm)	HEAD DIAMETER B (mm)	HEAD THICKNESS S (mm)
M4RH-E	M4 x 0.7	5.9	6	10	0.5-2.5	6.75	0.5
M5RH-E	M5 x 0.8	6.9	7	12	0.5-3.0	8	0.6
M6RH-E	M6 x 1.0	8.9	9	15	0.5-3.5	10	0.6
M8RH-E	M8 x 1.25	10.9	11	16	1.0-4.0	12	0.6

NUT CODE	THREAD SIZE d (mm)	NUT DIAMETER D (mm)	HOLE SIZE (-0/+0.1mm)	NUT LENGTH L (mm)	GRIP RANGE G (mm)	HEAD DIAMETER B (mm)	HEAD THICKNESS S (mm)
M3RH-A	M3 x 0.5	4.7	4.8	9	0.5-1.5	5.6	0.35
M4RH-A	M4 x 0.7	6.3	6.4	10.5	0.5-2.5	7.1	0.50
M5RH-A	M5 x 0.8	7.1	7.2	12	0.5-3.0	8.1	0.60
M6RH-A	M6 x 1.0	9.5	9.6	15	0.7-3.5	10.5	0.60
M8RH-A	M8 x 1.25	10.5	10.6	16	1.0-3.5	11.5	0.60
M10RH-A	M10 x 1.5	12.7	12.8	20	1.0-4.0	13.9	0.60

- Perfect for use in metal, fiberglass and rigid plastic previously too thin for tapped threads
- Provide a neat appearance after installation
- Once in place, the internal threads are ready for a screw or bolt

Easy Steps for Installation



Due to continuous development we reserve the right to alter specifications without prior notice.

Factory:

SRC METAL (SHANGHAI) CO., LTD.

SRC METAL (JIASHAN) CO., LTD.

<http://www.srcrivet.com>